

12

EUROPEAN PATENT APPLICATION

21 Application number: 83302016.7

51 Int. Cl.³: **A 61 K 7/11**
C 08 L 83/06, C 08 L 83/08

22 Date of filing: 11.04.83

30 Priority: 20.05.82 US 380178

43 Date of publication of application:
30.11.83 Bulletin 83/48

84 Designated Contracting States:
DE FR GB

71 Applicant: **DOW CORNING CORPORATION**
P.O. Box 1767
Midland Michigan 48640(US)

72 Inventor: **Starch, Michael Stephen**
3945 E. Patrick
Midland Michigan(US)

74 Representative: **Laredo, Jack Joseph et al,**
Elkington and Fife High Holborn House 52/54 High
Holborn
London, WC1V 6SH(GB)

54 Compositions used to condition hair.

57 A composition consisting essentially of a siloxane having substituents that provide attachment to the hair, surfactants, additives that provide freeze-thaw stability, and water is disclosed. The composition may also contain thickeners, and additives that reduce static electricity build-up, and fly-away. A method of conditioning hair which comprises applying to the hair the composition as defined above is also disclosed.

COMPOSITIONS USED TO CONDITION HAIR

This invention relates to a composition that consists essentially of a siloxane having substituents that provide attachment to the hair, surfactants, freeze-thaw stability additives, and water. The composition may also contain thickeners and additives that reduce static electricity build-up, and fly-away. This invention further relates to a method of conditioning hair which comprises applying to the hair the above-defined composition.

10 It is well known that hair is easily damaged mechanically by combing, brushing, and washing. It is also known that hair is easily damaged physically and chemically by the sun, hair dryers, and permanents or other chemical treatments.

15 In most detergent compositions now in use, the removal of natural oils is unavoidable as a part of the cleansing action, and some hair is damaged as a result of the action of the detergent. Furthermore, shampoo compositions which thoroughly clean the hair usually leave
20 it difficult to comb so that combing the hair produces an undesirable buildup of static electrical charges. In either case, the hair is very difficult to manage.

To overcome these problems, various alternative and complementary shampoo and hair conditioning systems
25 have been explored. For example, many conventional shampoo compositions contain animal oils such as lanolin and beef tallow, glycols, fatty esters, or proteins in an effort to condition the hair by replacing stripped oils so as to leave the hair more manageable and natural after
30 shampooing. However, when these derivatives are

incorporated directly into a shampoo, they may cause a loss of sudsing and sheen, and leave the hair with a sticky and unnatural feel. Vegetable oils such as camellia oil and olive oil, mineral oils such as vaseline
5 and paraffin, and synthetic oils have also been used either directly, as emulsions, or dissolved in solvents.

It is well known in the art that organopolysiloxanes give hair glossiness, suppleness, smoothness and softness. United States Patent Number 4,243,657 discloses
10 a hair dressing composed of dimethylpolysiloxane and diol derivatives or a branched aliphatic alcohol. The use of dimethylpolysiloxanes, however, allows dust to easily adhere to the hair due to the oil build-up caused by the quantity of siloxane required. Hair conditioners composed
15 of a polyorganosiloxane-polyoxyalkylene block copolymer and ethanol, such as those disclosed in Japanese Patent Sho 56[1980]-136214, have the problem that they are easily removed when exposed to water. Great Britain Patent Number 2,058,103 discloses hair grooming agents
20 composed of (alkylamino) methylpolysiloxane and a cationic surfactant with an aqueous carrier. Though the siloxane is durable, it is not effective in dissipating static charges generated by combing. Moreover, the level of durability achieved by this agent is not always desirable.
25 Furthermore, its hydroxyl endblocking is believed to be the cause of some stability problems. Cationic modified organopolysiloxanes containing quaternary nitrogen are disclosed in Japanese Patent Sho 55[1980]-66506. These conditioners, however, are lacking in providing the hair
30 suppleness, smoothness, and softness.


It is thus an object of this invention to provide a composition that is stable, somewhat durable, and imparts improved gloss, ease of combing, reduced

fly-away, suppleness, smoothness, and softness to the hair. It is a further object of this invention to provide a method of conditioning hair, particularly hair that has been damaged by excessive shampooing or chemical treatments.

This invention relates to a composition that consists essentially of a siloxane having substituents that provide attachment to the hair, surfactants, freeze-thaw stability additives, and water. This composition may also contain thickeners and additives that reduce static electricity build-up and fly-away. This invention further relates to a method of conditioning hair which comprises applying to the hair the above defined composition.

Specifically, this invention relates to a composition consisting essentially of

(A) a siloxane having the general formula



wherein R is a functional group that provides attachment to the hair;

X is selected from the group consisting of hydrogen, phenyl, hydroxyl, and saturated hydrogen radicals composed of 1 to 8 carbon atoms;

a has a value of 0 to 3;

b has a value of 0 to 1; and

n+m has a value of 1 to 2000 with n having a value of 0 to 1999 and m having a value of 1 to 2000;

(B) a surfactant;

(C) an additive that provides freeze-thaw stability; and

(D) water.

The functional group on the siloxane, R, can be any group that provides attachment to the hair. It is preferred, however, that R be a monovalent radical having the general formula $C_yH_{2y}Z$ wherein y has a value of 2 to 8 and Z is selected from the group consisting of

5 $-NR'CH_2CH_2NR'_2$, $-COOH$, $-SCH_2COOH$, $-\overset{\overset{O}{\parallel}}{C}NR'_2$, $-NR'_2$, $-N^+R'_3A^-$,

$-N^+R'H_2A^-$, and $-NR'CH_2CH_2N^+R'H_2A^-$ wherein R' is selected from the group consisting of hydrogen, phenyl, benzyl, and

10 monovalent saturated hydrocarbon radicals composed of 1 to 20 carbon atoms and A^- is a halogen. Specific examples of monovalent saturated hydrocarbon radicals composed of 1 to 20 carbon atoms include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl,

15 dodecyl, tetradecyl, hexadecyl, octadecyl, and eicosyl radicals. Specific examples of suitable halides, A^- , include chlorides, bromides, iodides, and fluorides. It is optimal, however, that R be selected from the group consisting of $C_4H_8NHCH_2CH_2NH_2$, $C_4H_8NHCH_2CH_2N^+R'H_2A^-$ and

20 C_4H_8COOH wherein R' is benzyl.

The substituent on the siloxane, denoted by X, is selected from the group consisting of hydrogen, phenyl, hydroxyl and saturated hydrocarbon radicals composed of 1 to 8 carbon atoms. Specific examples of suitable

25 saturated hydrocarbon radicals include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl and octyl. It is preferred, however, that X be a methyl radical.

It is further preferred that \underline{a} have a value of 0, \underline{b} have a value of 1, and $n+m$ have a value of 50 to 150

30 with \underline{n} having a value of 49 to 149 and \underline{m} having a value of 1 to 10.

The composition also contains (B) a surfactant, (C) an additive that provides freeze-thaw stability, and (D) water.

5 Though the type of surfactant employed is not critical for the purpose of this invention, typical surfactants include cationic, non-ionic and anionic surfactants and mixtures thereof. The purpose of the surfactants is to maintain a stable dispersion of the silicone. Anionic surfactants include carboxylates, sulfonates, sulfates, 10 and phosphate esters. Cationic surfactants include amines and quaternary salts. Non-ionic surfactants include polyoxyethylene derivatives of fatty alcohols, carboxylic esters, and carboxylic amides.

15 It is preferred that the surfactant be non-ionic. Specific examples of suitable non-ionic surfactants include polyoxyethylene octyl phenol containing 10 polyoxyethylene units, an alkyl ether of polyoxyethylene, an alkyl aryl ether of polyoxyethylene, trimethylnonyl polyethylene glycol ether, octyl phenoxy 20 polyethoxy ethanol, and mixtures thereof. It is preferred that the surfactant be a mixture of approximately equal parts of trimethylnonyl polyethylene glycol ether and octyl phenoxy polyethoxy ethanol.

25 It is preferred that Component (C), the additive that provides freeze-thaw stability, be selected from the group consisting of ethylene glycol and glycerol. It is further preferred that it be ethylene glycol.

 It is preferred that the composition to condition hair consist essentially of

0.1 to 61	percent by weight Component (A),
0.02 to 11.6	" " " " (B),
0.003 to 2	" " " " (C),
and 0.16 to 99.88	" " " " (D).

5 If desired, the composition may further contain (E) a thickener, and (F) an additive that reduces static electricity build-up and fly-away.

It is preferred that the thickener be selected from the group consisting of methylcellulose and a
10 neutralized polymer of acrylic acid crosslinked with a polyfunctional agent.

It is preferred that (F) the additive that reduces static electricity build-up and fly-away be a quaternary amine. It is further preferred that the
15 quaternary amine additive have the general formula $A^-N^+R'_4$ where R' is selected from the group consisting of hydrogen, phenyl, benzyl, and monovalent saturated hydrocarbon radicals composed of 1 to 20 carbon atoms, and A^- is a halogen. Specific examples of suitable monovalent
20 saturated hydrocarbon radicals composed of 1 to 20 carbon atoms include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tetradecyl, hexadecyl, octadecyl and eicosyl. Specific examples of suitable halides, A^- , include chlorides, bromides,
25 iodides, and fluorides. It is optimal that the quaternary amine additive be $C_{18}H_{37}N^+(CH_3)_3Cl^-$. The quaternary amine additive also functions, to a certain extent, as a thickener.

It is optimal that the composition contain
30 components (A), (B), (C), (D), (E) and (F). The ease of application to the hair is improved by the presence of all six (6) ingredients due to the viscosity increase. For convenience purposes only, it is preferred that the

composition to condition hair have a viscosity range of 1000 centipoises to 100,000 centipoises at 25°C and a pH value range of 7 to 9.

It is optimal that the composition consist essentially of

5	0.1 to 15	percent by weight Component (A),
	0.012 to 2.85	" " " " (B),
	0.003 to .43	" " " " (C),
	73.72 to 99.685	" " " " (D),
10	0.1 to 3	" " " " (E),
	and 0.1 to 5	" " " " (F).

The components of the present invention are well known to those skilled in the art so the preparation of the individual components will not be repeated here. It is preferred that the composition of the present invention be used as a hair conditioner treatment after shampooing. Any suitable method of application may be employed, for example, immersion or spraying.

In addition to the essential ingredients, the composition of this invention may include minor quantities of optional materials which are added for specific purposes. Such other ingredients include, but are not limited to, medicaments, solvents, perfumes, sequestering agents, opacifiers, and antimicrobial preservatives, of which silicone is one, all of which are commonly used and are well known to be capable of use in hair care formulations.


The term "hair" as used in the present invention includes treated and untreated human hair, animal hair, and any type of fiber that needs gloss, ease of combing, and reduced fly-away. Treated hair includes hair that is chemically changed and/or damaged by permanents and dyes.

In order that those skilled in the art may better understand how the present invention can be practised, the following examples are given by way of illustration and not by way of limitation. All parts and percents referred to herein are by weight, and all viscosities are measured at 25°C unless otherwise noted. The formulations were tested at water dilutions of 30%, but under normal use conditions, the formulations would be used as is, with no water dilution.

10 Example 1

The following formulations were tested as conditioners on dark European hair swatches and compared to unconditioned dark European hair swatches on the basis of feel and ease of wet and dry combing. The combing rating scale ranged from 1 to 5 with 1 being easy to comb, very little resistance, and 5 being impossible to get the comb through the hair.

Formulation 1 was prepared by heating 90 grams of water to approximately 90°C and then dispersing 2.0 grams of methylcellulose and 0.5 gram of sodium chloride in the water using a medium-shear mixing device. Stirring was continued until the dispersion was at 65°C. Then there was added 1.5 grams of stearalkonium chloride and 1.0 gram of cetyl alcohol, and it was made sure both these ingredients were thoroughly dispersed. The mixture was allowed to cool to 40°C with stirring in such a way that no foam was generated. Finally, there was added 5.0 grams of a material prepared as follows: Mix 3.60 grams octyl phenoxy polyethoxy ethanol, specifically Triton X-405 manufactured by Rohm and Haas Company, and 12 grams of water. Slowly, add 35.00 grams of

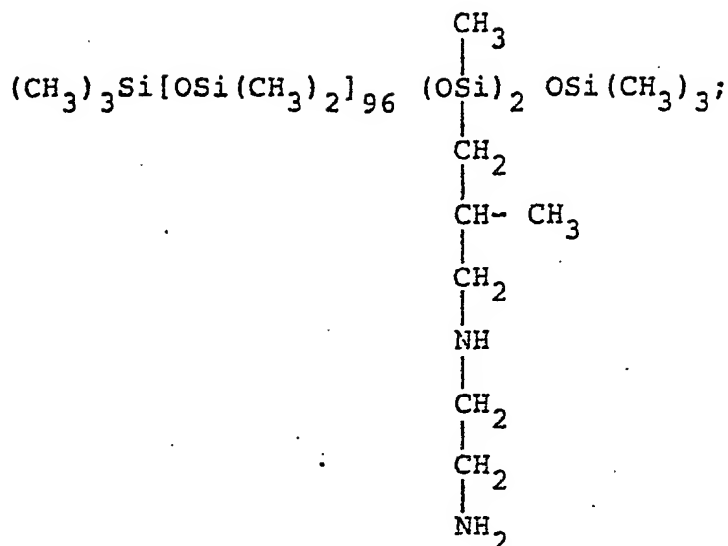


(This polymer normally contains 5% dimethylsiloxane
cyclics as manufactured) with mixing. After stirring for
10 minutes, 3.06 grams of Tergitol TMN-6, a trimethylnonyl
polyethylene glycol ether manufactured by Union Carbide
5 Company, are added slowly. The mixture is then stirred for
3 hours using a high shear mixer (stirring for 1 hour
and then passing through a colloid mill with a 0.015 inch
gap is comparable). One gram of ethylene glycol and 45.34
grams of water are then added and the mixture is stirred
10 until uniform.

Formulation 1 was then diluted to 30 percent in
water for testing purposes.

Formulation 2 was prepared by dispersing and
dissolving 0.24 gram Carbopol, a polymer of acrylic acid
15 crosslinked with a polyfunctional agent manufactured by
B.F. Goodrich Company, into 47.315 grams water and 0.13
gram sodium hydroxide into 47.315 grams water. Then the
sodium hydroxide solution was added to the Carbopol
solution while slowly stirring. Gelation is common as
20 the sodium hydroxide solution is added. The pH of the

mixture should be 7 or higher. If it is not, adjust upwards with a small amount of sodium hydroxide. Next there was added 5.00 grams of a material prepared as follows: Mix 3.60 grams octyl phenoxy polyethoxy ethanol,
 5 specifically Triton X-405 manufactured by Rohm and Haas Company, and 12 grams of water. Slowly, add 35.00 grams of

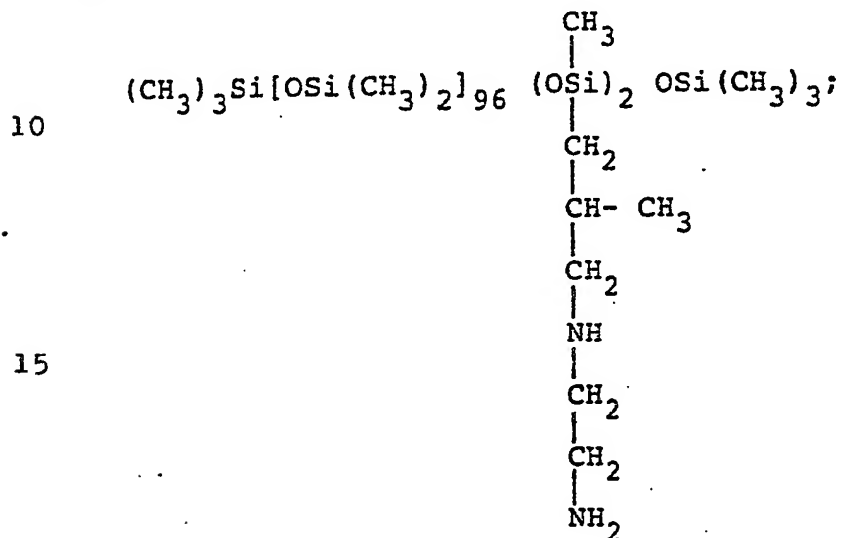

20 (this polymer normally contains 5% dimethylsiloxane cyclics as manufactured) with mixing. After stirring for 10 minutes, 3.06 grams of Tergitol TMN-6, a trimethylnonyl polyethylene glycol ether manufactured by Union Carbide Company, are added slowly. The mixture is then stirred for
 25 3 hours using a high shear mixer (stirring for 1 hour and then passing through a colloid mill with a 0.015 inch gap is comprable). One gram of ethylene glycol and 45.34 grams of water are then added and the mixture is stirred until uniform.

30 Formulation 2 was then diluted to 30 percent in water for testing purposes.

The formulations were applied to wet hair, after it was shampooed, in an amount sufficient to thoroughly coat the hair. The conditioners were allowed to stay on the hair for 2 minutes and then were rinsed off with warm water. After evaluating the wet combing and wet feel, the hair was blown dry and then evaluated for dry combing.

The results are as follows:

		Formulation	
<u>Test</u>		<u>1</u>	<u>2</u>
10	Wet Comb Rating	1.2	1.0
	Wet Feel	Smooth	Smooth
	Dry Comb Rating	1.0	1.0

Claims:

1. A composition consisting essentially of
 - (A) a siloxane having the general formula

$$R_a X_{3-a} Si(OSiX_2)_n (OSiX_b R_{2-b})_m OSiX_{3-a} R_a$$
 wherein R is a functional group that provides attachment to the hair;

X is selected from the group consisting of hydrogen, phenyl, hydroxyl, and saturated hydrocarbon radicals composed of 1 to 8 carbon atoms;

a has a value of 0 to 3;

b has a value of 0 to 1; and

n+m has a value of 1 to 1999 with n having a value of 0 to 2000 and m having a value of 1 to 2000;
 - (B) a surfactant;
 - (C) an additive that provides freeze-thaw stability; and
 - (D) water.
2. The composition as defined in claim 1 wherein the composition consists essentially of

0.1 to 61	percent by weight	Component (A),
0.02 to 11.6	" " "	(B),
0.003 to 2	" " "	(C),
and 0.16 to 99.88	" " "	(D).
3. The composition as defined in claim 1 or 2, wherein the composition contains (E) a thickener and (F) an additive that reduces static electricity and fly-away.

4. A method for conditioning hair which comprises applying to the hair the composition as defined in any of claims 1 to 3.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.